




Cutters

Rollepaal offers a wide range of cutters and chamfering machines (CCM & RCM). Rollepaal cutters run in a range of diameters from 20 to 520mm (3/4"- 20"). The unique design of the Rollepaal cutters incorporate chisel cutting devices that rotate around the pipe, making this a dust-free system.



Rollepaal

Pipe Extrusion Technology

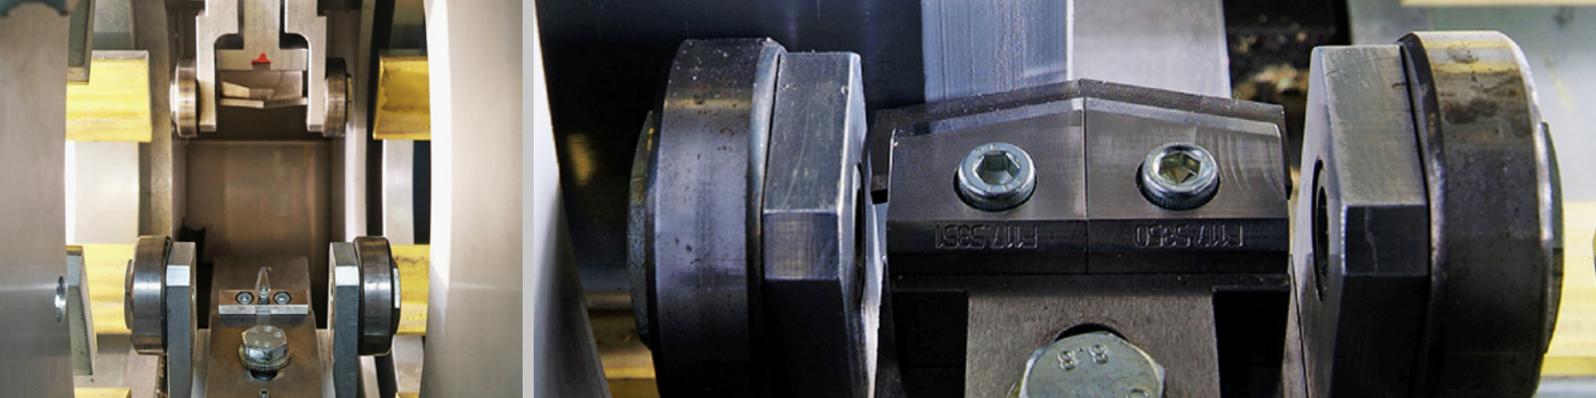

Cutters

Cutting & Chamfering Machine - CCM

The CCM is a modular automatic cutting and chamfering machine for plastic pipes with diameters from 32 to 500mm (1 ¼"-20").

Before cutting the pipe, two pneumatically actuated clamp assemblies with four arms each secure the carriage to the moving plastic pipe, ensuring that the carriage moves along at the same speed as the pipe. With this system, the pipe can be cut and chamfered without interrupting the production process. None of the components need to be changed when moving over from one pipe to the next. Tool movement and carriage are controlled by a camdisk.

Rollepaal Cutting Machine - RCM

The RCM is an automatic cutting and chamfering machine for plastic pipes with diameters from 20 to 520mm (3/4"- 20"). The RCM range was designed especially to cut conversion times and cycle time significantly and to ensure smooth ejection of the cutting swarf. The advanced technology ensures uniform cutting and chamfering and makes the RCM relatively insensitive to irregularities in the shape of the pipe. Tool movement is controlled by a camdisk.

A dust-free production of any application and an excellent cut for the socketing device are guaranteed with Rollepaal cutters, as are ease of use, a robust design, and solutions for PP, PE, PVC and high filled materials.

Features and benefits of the Rollepaal RCM

- ▶ Multiple cutting lengths in one line
- ▶ Optimal cutting speeds mean longer service life of cutting tools
- ▶ Faster movement towards the pipe which results in faster cutting
- ▶ Most parameter settings displayed on touchscreen

Features and benefits of Rollepaal cutters

- ▶ Swarfless and non-swarfless cutting machines
- ▶ All movements are electro-mechanically driven (no hydraulics)
- ▶ Cutting parameters can be set during production
- ▶ Tool change during production
- ▶ Use of standard cutting tools
- ▶ Low noise level
- ▶ Clean and dust-free cut
- ▶ Easy operator interface
- ▶ Unmatched quality of cutters

Product range

	Pipe diameter				Pipe wall thickness		Maximum line speed*		Shortest pipe length	
	min		max		PVC		m / min	inch / min	mm	inch
	mm	inch	mm	inch	mm	inch				
RCM 4	20	0.8	125	4.9	12	0.5	24	945	200	8.0
RCM 8	25	1.0	225	8.8	20	0.8	16	629	200	8.0
RCM 16	90	3.6	410	16.1	25	1.0	12	472	400	16.0
RCM 20	110	4.4	520	20.4	35	1.3	9	354	500	20.0
CCM 32-170	32	1.2	170	6.7	8	0.3	13.3	523		
CCM 50-250-V	50	2	250	9.8	25	1.0	12	472		
CCM 110-450-V	110	4.4	450	17.7	25	1.0	8	315		
CCM 160-500-V	160	6.3	500	19.7	25	1.0	8	315		



Rollepaal

Pipe Extrusion Technology

P.O. Box 21
7700 AA Dedemsvaart
The Netherlands
Rollepaal 13
7701 BR Dedemsvaart

Phone +31 (0)523 62 45 99
info@rollepaal.com

www.rollepaal.com